



Halogen Point Heater Laboratory-Kit
HPH-35CA/f15-110w +HCV
Focal size $\Phi 6$
Easily heating high temperatures!

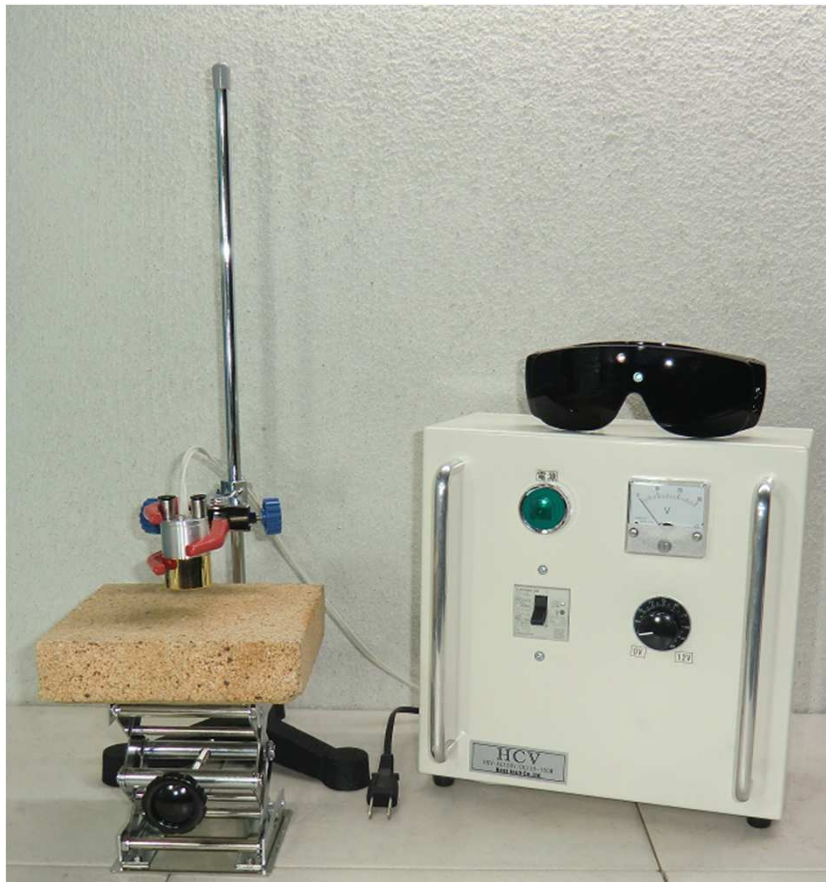

◆ **Feature** ◆


- 1). Easily heating high temperatures by the kit !
- 2). Easily heating high temperatures at focal size $\Phi 6$!
- 3). Easily adjusting the radiation diameter (focal size) by manual lift!
- 4). Easily changing the heat power (wattage) by slide transformer !
- 5). Easily cooling by compressed air!

Heat-tech

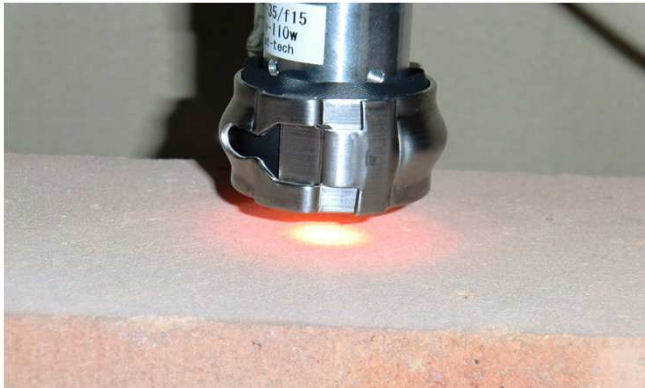


【 Power: 5v/about25w 】

The output was adjusted to 5v by the slide transformer.
It can visually check the rated point in diameter $\Phi 6$ of 25w.

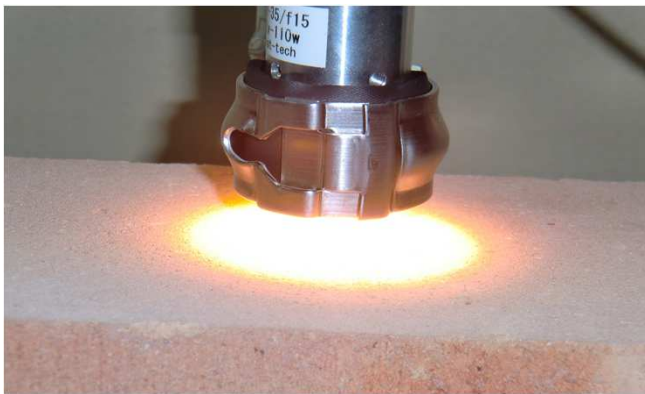


【 Power: 12v/110w 】

It shine so very bright emission of heat generation 110W maximum output.
The diameter of a rated point cannot be visually checked.

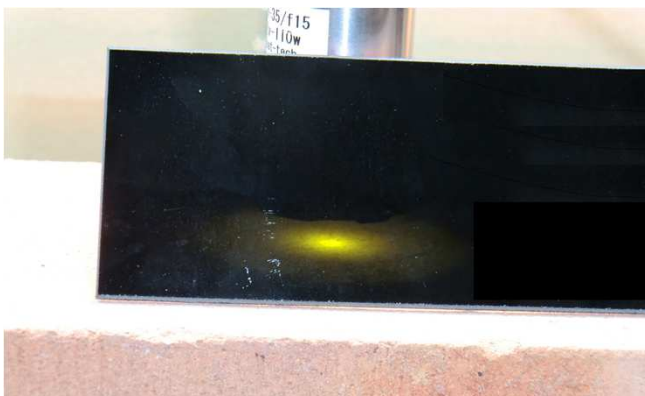

【 Power: 12v/110w Used the protective glass. 】

Then attached protective glasses are used,
positioning of an irradiation point can be performed easily visually.

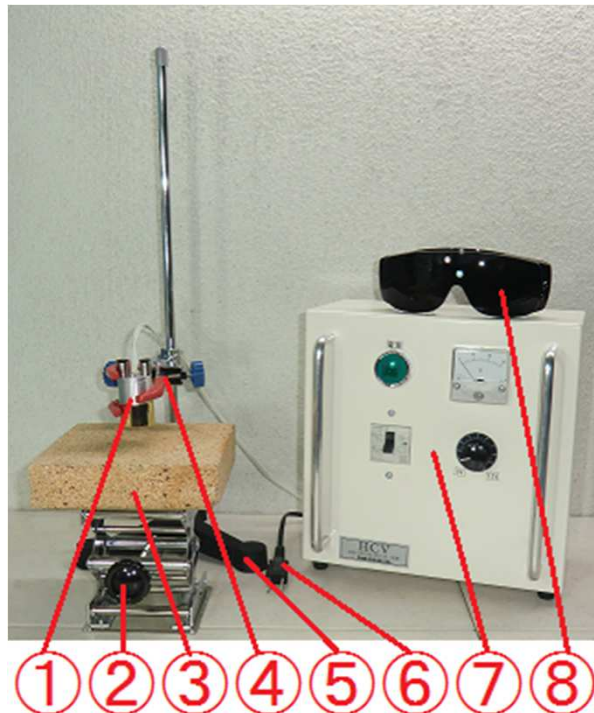

Example of lab kit assembly.


(※The lab kit is delivered as individual components.)

【Lab kit packing product】

- ① Air cool type small Halogen Point Heater HPH-35CA/f15/12v-110w/GW
Heating the subject with 110w.
- ② Manual lift.
Up and down 80 mm by 16 rotating knobs, the accuracy is 0.5 mm.
- ② Manual lift. Platform surface is 100mm x 100mm,
- ③ Square Australia Brick. It is useful when place the test piece.
- ④ Heater mounting bracket
- ⑤ Test stand
- ⑥ Power cable for heater controller
- ⑦ Manual variable power supply HCV-AC100-240V/DC12V-300W
Input voltage in the range of AC100V-AC240V.
The output adjustable range DC0v ~ 12v.
Easily changing the heat power (wattage) by slide transformer.
- ⑧ Safety glasses against high intensity light
It can visually check the high-intensity irradiation point at maximum output.

※ In addition to the above, compressed air for cooling is required for use.


【 Lab-kit Actual wiring diagram 】

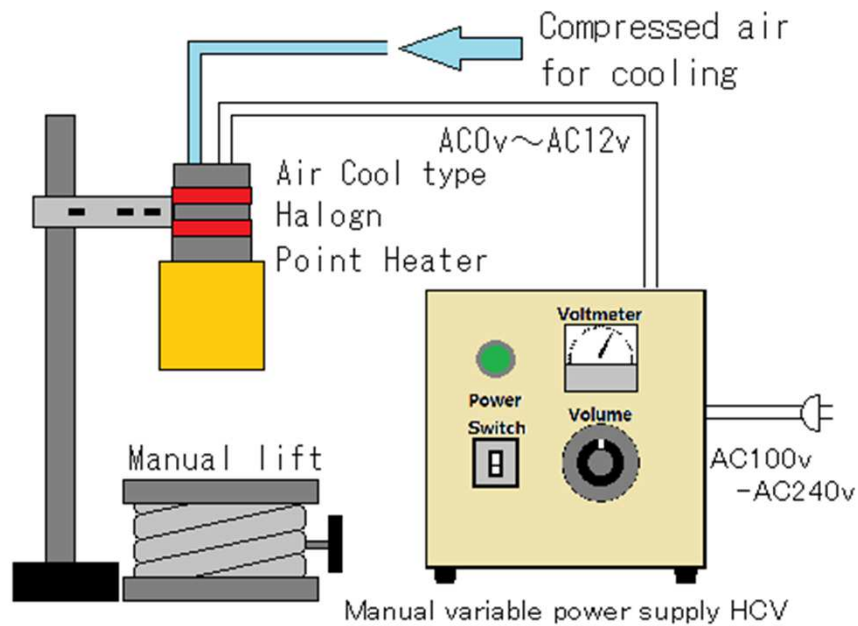

【 Soldering of printed circuit boards 】

* We have no idea about how to lead-free soldering of printed circuit boards.

→→The point was heated by the small type of the Halogen Point Heater.
Elevating the temperature time is short, it worked so easy soldering temperature control.
Moreover, since non-contact, no physical damage even solder dregs.

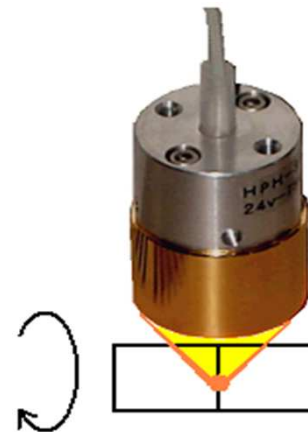

【 Joint of thermoplastic resin tubes 】

* We have no idea about how to joint of thermoplastic resin tubes.

→→The thermoplastic resin tube was joined with the Halogen Point Heater.
The heating melt was done, and central portion of the tube wall thickness at the tube end was pressurized comparing the edges, and connected to the subject by the anastomoses.

Non-touch High temperature heating

Heat-tech

Heat-tech Co., Ltd.

<https://heater.heat-tech.biz/>

International Medical Device Alliance IMDA

1-6-5 Minatojima Minamimachi Chuoku Kobe 650-0047 Japan

TEL 81-78945-7894 FAX 81-78945-7895

E-mail info@heat-tech.biz